

REV	DESCRIPTION	DRAWN	DATE

Frequency Range : 0 ~ 6 GHz

Impedance : 50 ohm


Attenuation Values : 6 dB

VSWR : 1.3:1 max

Input Power Rating : 2 Watts average

Connector : N PLUG TO N JACK

Operating temperature : - 40°C ~ +70°C

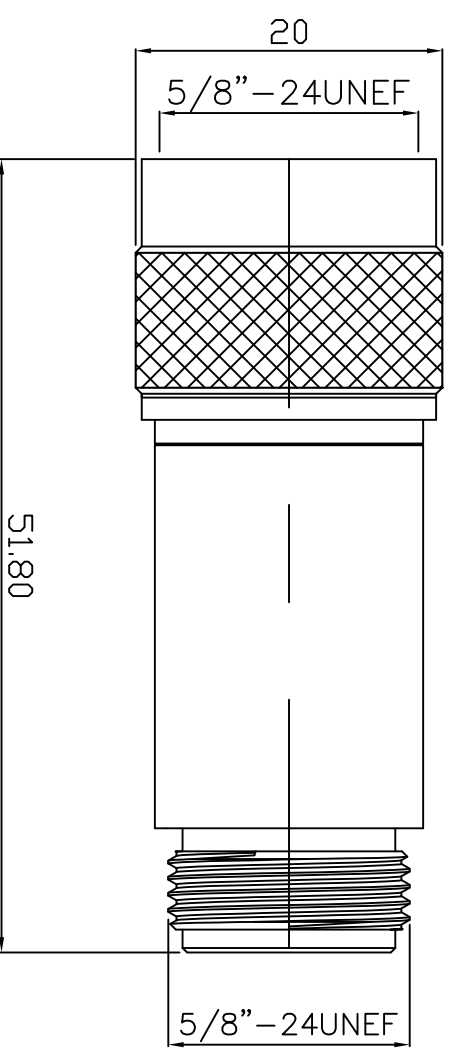


NO	DESCRIPTION	Q'TY	MATERIAL	FINISH
5	SHELL	1	BRASS	NICKEL
4	INSULATOR	2	TEFLON	NONE
3	PIN	1	BRASS	GOLD
2	PIN	1	BRASS	GOLD
1	BDDY	2	BRASS	NICKEL

UNLESS OTHERWISE SPECIFIED  
 1. REMOVE ALL BURRS.  
 2. BREAK ALL CONNERS & EDGES 0.15 MAX.  
 3. CHAMFER 1ST & LAST THREADS 45°.  
 4. DIAMETERS DN COMMON CENTERS TO BE CONCENTRIC WITHIN 0.1 TLR  
 5. ALL DIMENSIONS ARE AFTER PLATING.

\* MAJOR DIMENSION

UNLESS OTHERWISE NOTED TOLERANCES  
 0.5-6=±0.2  
 6-30=±0.4  
 30-120=±0.6  
 120-315=±1.0  
 ANGLES=±1°

SCALE	1/1	UNIT	MM	DRAWNDATE
APPROVED	CHECKED	DRAWN	Anydy	DRAWNDATE


  
 CHINA HOME TECHNOLOGY Co., Ltd.

TITLE 0-6G N PLUG TO N JACK Attenuators 6 dB  
 DRAWING NO. ATT-05-NMNF  
 REV A

FILE NO.