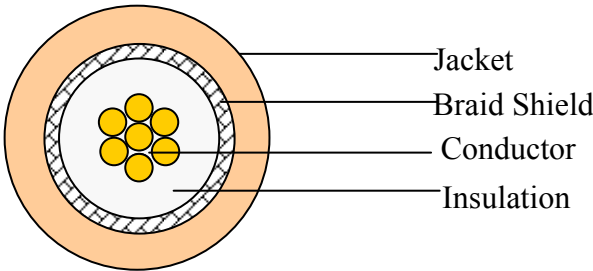


RG174 COAXIAL CABLE

SPECIFICATION

Standard : MIL - C - 17					
	Material	----	Copper Covered Steel Wire		
	Conductors No.	----	7/0.16mm		
	Outside Diameter	mm	0.49mm		
Insulation	Material	----	Solid Polyethylene		
	Color	----	Clear		
	Average Thickness	mm	0.52mm		
	Diameter	mm	1.5 ± 0.05mm		
Braid Shield	Material	----	Tinned Copper Wire		
	Construction	mm	16x4 / 0.10mm		
	Coverage	%	85		
	Diameter	mm	1.92±0.05mm		
Jacket	Material	----	ROHS PVC		
	Color	----	Black		
	Overall Diameter	mm	2.80 ± 0.1mm		
Marking	-----				
Drawing					
Electrical & Physical Propertie					
Nom. Impedance	Ω	50 ± 3 Ω			
Insulation Resistance	MΩ / km	1000 ↑			
Capacitance	pF/M	78 ± 3			
Attenuation (dB / 100M)	100MHz	200MHz	400MHz	700MHz	900MHz
	27.6	41.0	62.3	88.6	101.8