

REV	DESCRIPTION	DRAWN	DATE

Frequency Range : 0 ~ 6 GHz

Impedance : 50 ohm


Attenuation Values : 30 dB

VSWR : 1.3:1 max

Input Power Rating : 1 Watts average

Connector : N PLUG TO N JACK

Operating temperature : - 40°C ~ +70°C

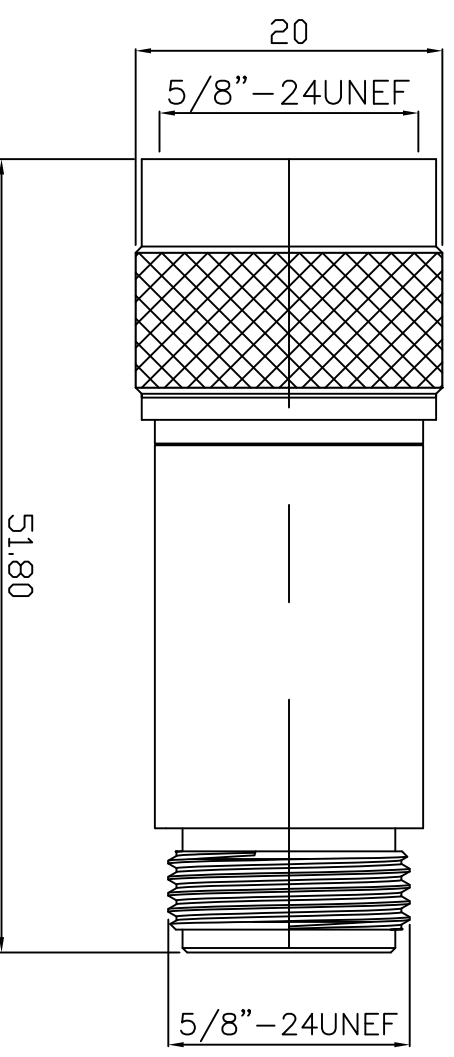

NO	DESCRIPTION	Q'TY	MATERIAL	FINISH
5	SHELL	1	BRASS	NICKEL
4	INSULATOR	2	TEFLON	NONE
3	PIN	1	BRASS	GOLD
2	PIN	1	BRASS	GOLD
1	BDDY	2	BRASS	NICKEL

UNLESS OTHERWISE SPECIFIED
 1. REMOVE ALL BURRS.
 2. BREAK ALL CONNERS & EDGES 0.15 MAX.
 3. CHAMFER 1ST & LAST THREADS 45°.
 4. DIAMETERS DN COMMON CENTERS TO BE CONCENTRIC WITHIN 0.1 TLR
 5. ALL DIMENSIONS ARE AFTER PLATING.

* MAJOR DIMENSION

UNLESS OTHERWISE NOTED TOLERANCES
 0.5-6=±0.2
 6-30=±0.4
 30-120=±0.6
 120-315=±1.0
 ANGLES=±1°

SCALE	UNIT	MM	DRAWNDATE
1/1			

APPROVED	CHECKED	TITLE	DRAWING NO.	FILE NO.
		0-6G N PLUG TO N JACK Attenuators 30 dB	ATT-04-NMNF	



REV	A